


# Dixon Ladder Dimension

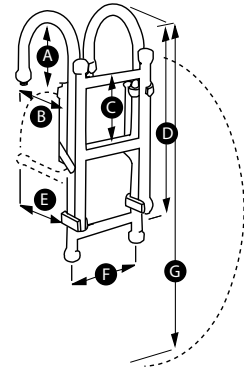

Nominal Ladder Measurements In Millimeters  
25mm per Inch

		Hoop inside height from deck	Hoop inside diameter	Deck to 1st leg	Deck to 1st step	Fixed Mounting Centres	Tread Spacing	Folded Ladder (overall)	Leg Length	Width of Ladder	Extended Ladder
<b>Permanent Ladders</b>		A	B	B1			C	D	E	F	G
BP500	mm	-	-	-	200	277w	255	590	-	305	500 from deck
BP500+2	mm	-	-	-	200	277w	255	590	-	305	960 from deck
BP640	mm	-	-	-	100	277w	255	730	-	305	640 from deck
BP640+2	mm	-	-	-	100	277w	255	730	-	305	1110 from deck
BP800	mm	-	-	-	240	277w	255	889	-	305	800 from deck
PFO 2	mm	70	-	-	330	330w x 130f/a	255	526	-	305	700 from deck
PFO 3	mm	70	-	-	170	330w x 130f/a	255	619	-	305	790 from deck
PFO 4	mm	70	-	-	170	330w x 130f/a	255	619	-	305	900 from deck
PST 2 std	mm	259	-	-	150	270w x 160f/a	255	200 below deck	-	305	480 from deck
PST 3 std	mm	259	-	-	150	270w x 160f/a	255	200 below deck	-	305	620 from deck
F3A	mm	-	-	variable	variable	218w x 223h	255	450	120 / 175	305	760 overall
F3 B	mm	-	-	variable	variable	218w x 223h	255	450	100	305	760 overall
F4 A	mm	145	185	275 variable	247 variable	218w x 277h	255	720	120 / 180	305	1150 overall
F4 B	mm	145	185	275 variable	247 variable	218w x 277h	255	720	100	305	1150 overall
F5 A	mm	145	185	275 variable	247 variable	277w x 400h	255	970	120 / 180	305	1410 overall
F5 B	mm	145	185	275 variable	247 variable	277w x 400h	255	970	100	305	1410 overall
RTF 5	mm	-	-	variable	variable	277w x 285h	255	595	100	305	1040 overall
RTF 7	mm	-	-	variable	variable	277w x 500h	255	850	100	305	1550 overall
SW1	mm	-	-	-	382	277w	255	436	-	305	410 from deck
SW2	mm	-	-	-	216	277w	255	527	-	305	500 from deck
SW3	mm	-	-	-	216	277w	255	782	-	305	754 from deck
TF4	mm	-	-	variable	variable	277w x 410h	255	590	100	305	1050 overall
U/0003	mm	-	-	-	335	330	255	540	-	350	880
<b>Removable Ladders</b>											
115R	mm	145	185	275	212	277w x 275h	255	720	180	305	1155 overall
140R5	mm	145	185	530	212	277w x 530h	255	970	230	305	1400 overall
140R6	mm	145	185	530	212	277w x 530h	255	970	230	305	1655 overall
115 BP R2	mm	145	185		212	277w	255	720	-	305	675 overall
140 BP R3	mm	145	185		212	277w	255	970	-	305	970 overall
115 BP R4	mm	145	185		212	277w	255	720	-	305	1155 overall
140 BP R5	mm	145	185		212	277w	255	970	-	305	1400 overall
140 BP R6	mm	145	185		212	277w	255	970	-	305	1655 overall
DS 2	mm	-	-	variable	variable	277w x 501h	255	573	175	305	573 overall
DS 3	mm	-	-	variable	variable	277w x 756h	255	828	210	305	828 overall
TR2	mm	-	-	variable	variable	277w x 410h	255	590	180	305	590 overall
TR4	mm	-	-	variable	variable	277w x 410h	255	590	180	305	1050 overall
TR6	mm	-	-	variable	variable	277w x 665h	255	835	180	305	1545 overall